

JET SERIES SELF-PRIMING JET PUMPS

JET series are suitable for pumping clean water. They are particularly suitable for domestic applications such as supply water from well, pool etc, the automatic distribution of water by surge tanks and pressure switch, gardening, and increasing of water pressure.

WORKING CONDITIONS

Max Temperature of Fluid up to +80℃



Max Pressure 10bar,

Max Ambient Temperature up to 40℃



JET

H m PERFORMANCE CHART AT n=2900r/min

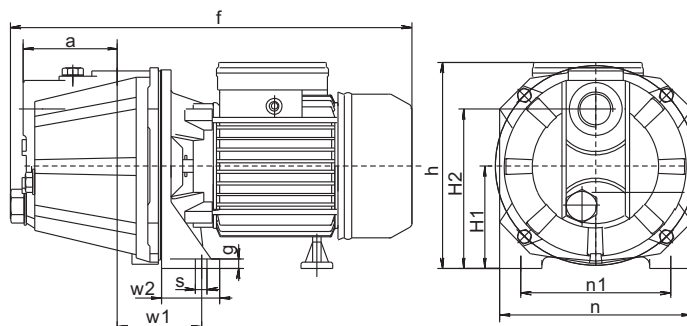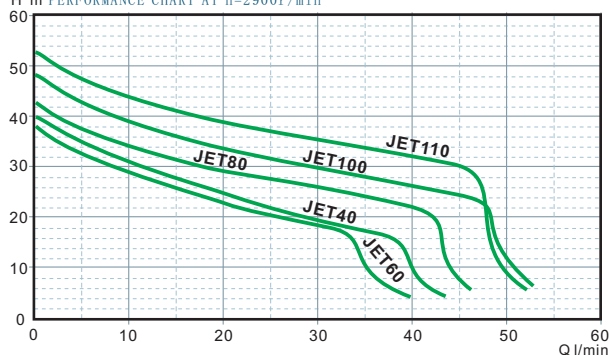

DIMENSIONS

TYPE	Dimensions mm											Weight (kg)		PackingSize (mm)			Packing QTY. 20'Cont
	a	f	h	H1	H2	W1	W2	n	n1	g	s	NW	GW	L	W	H	
JET-40A	94	366	178	90	130	89	60	142	96	7	8	8.7	9.5	410	210	220	1500
JET-60	90	380	196	98	152	79	55	182	142	9	11	11.8	12.6	420	210	220	1300
JET-80	90	380	196	98	152	79	55	182	142	9	11	12.5	13.5	420	210	220	1300
JET-100	90	380	196	98	152	79	55	182	142	9	11	13.1	14.1	420	210	220	1300
JET-110	90	380	196	98	152	79	55	182	142	9	11	13.8	14.8	420	210	220	1300

TECHNICAL DATA

TYPE	Power		Current (A)	Capacitor (μF)	H.max (m)	Q.max (l/min)	Size (inch)	S.Head (M)	Total head (m)	Capacity l/min					
	kW	HP								5	10	20	30	40	50
JET-40A	0.33	0.45	2.1	12	35	45	1"X1"	9		35	31	24	19.5	10	
JET-60	0.37	0.50	3.2	12	38	42	1"X1"	8		35	29	23	18		
JET-80	0.55	0.75	3.8	16	45	46	1"X1"	8		38	34	29	26	22	
JET-100	0.75	1	5	20	50	52	1"X1"	8		44	39	34	30	26.7	9
JET-110	1.1	1.5	4.9	20	53	65	1"X1"	8		47	44	39	36	33	12

Standard data and equipment: single phase 220V/50Hz, Brass impeller, carbon steel motor shaft, with terminal protector inside.

Others model and material such as three phase, 110V, 60Hz, dual voltage, stainless steel shaft, etc, will be available upon request.