


JSW/JSP SERIES SELF-PRIMING PUMPS

Advantage:

1. Dry running resistance: no water in the pump body when the machine automatically stop after 7 minutes.
2. Antirust function: running down after 72 hours, can automatically boot operation, to prevent pump rusty due to long time not running.
3. No impact voltage stabilizing function: open the faucet water pressure is lower than the start-up pressure pipeline, water pump operation automatically, until the tap shut down seven minutes after downtime, unlike the old mechanical switch frequently jump, cause pipeline hydraulic impact and current impact.

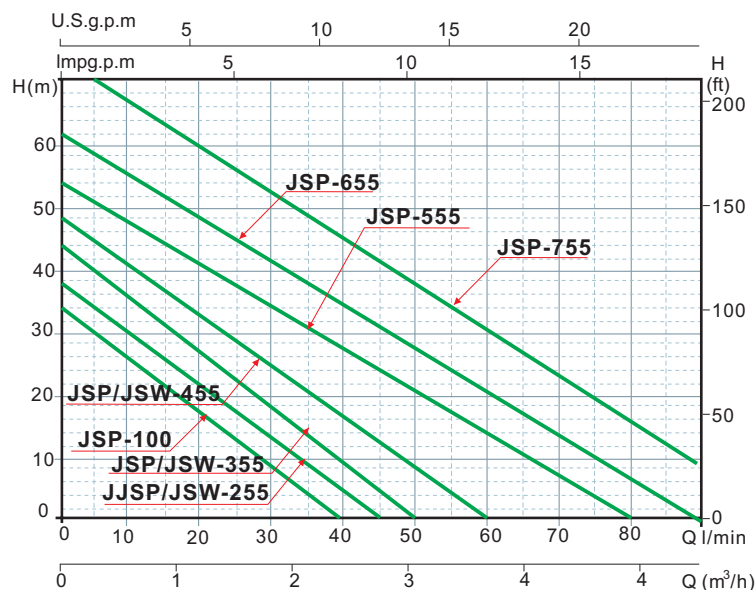

WORKING CONDITIONS

Max Temperature of Fluid up to +80°C
 Max Pressure 10bar,
 Max Ambient Temperature up to 40°C



PERFORMANCE

TYPE	Power		Ampere		R.P.M	Q.Max (l/min)	H.Max (m)	S.Head (M)	Pipe Dia	LxWxH (mm)	N.W (kg)
	KW	HP	1~220V	3~380V							
JSP-100	0.33	0.45	2.7	-	2850	40	35	9	1"X1"	420x170x180	10.2
JSP/JSW-255	0.37	0.5	3	-	2850	45	38	9	1"X1"	420x170x180	14.0
JSP/JSW-355	0.55	0.75	3.6	-	2850	50	45	9	1"X1"	460x210x230	15.1
JSP/JSW-455	0.75	1	4.8	-	2850	60	48	9	1"X1"	460x210x230	16.0
JSP-555	1.1	1.5	7.5	2.7	2850	80	56	9	1½"X1½"	590x218x258	26
JSP-655	1.5	2	9.6	3.5	2850	90	62	9	1½"X1½"	590x218x258	27.5
JSP-755	2.2	3	13.5	5.0	2850	100	75	9	1½"X1½"	590x228x258	29

Standard data and equipment: single phase 220V/50Hz, Brass impeller, carbon steel motor shaft, with terminal protector inside.
 Others model and material such as three phase, 110V, 60Hz, dual voltage, stainless steel shaft, etc, will be available upon request.